
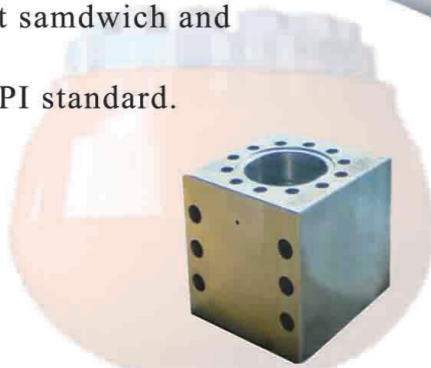


阀箱 :

阀箱产品是由优质合金结构钢锻造而成, 无夹层、裂纹等缺陷, 产品完全符合 API 规定标准。

Module (Valve Box) :

Valve box is forged by high-quality alloy constructional steel without sandwich and flaw meeting completely API standard.

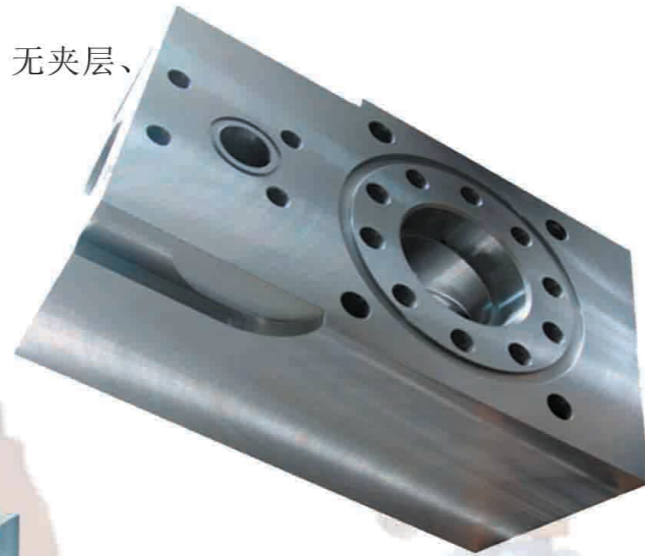

压筒、法兰、螺栓 :

可提供各种泵型的阀箱配用压筒、法兰、螺栓等产品。

Cover Locking、Flange、Bolts :

Providing all kinds of flanges, bolts and others spares matching up to the valve box of manifold pumps.



安全阀 :

保证泥浆泵在不超过额定的工作压力范围内使之正常运转。
特点: 1. 开闭灵活; 2. 承压活塞面积小; 3. 复位简单; 4. 通用性好

Safety Valve : Insuring the mud pump not to exceed the rate working pressure range.

- Features: 1. Opening and closing neatly.
2. Piston's bearing pressure area is small.
3. To reposition simply.
4. Safety Valve may use for multifold mud pumps.



喷淋泵 :

其作用是在泥浆泵的运转过程中对缸套和活塞进行冲洗和冷却。

Spray Pump : The operation of spray pump is that washing and cooling the liners and pistons during the pump running.

2S 齿轮泵 :

主要用于泥浆泵压力润滑系统, 以保障十字头、十字头轴承和介杆等零部件的润滑。

2S Gear Pump : 2S Gear Pump is mainly used for mud pump pressure lubrication system. The fuction of gear pump is for lubricating the crosshead, crosshead bearing , intermediate rod and others spares.

